

# HYUNDAI SOLAR MODULE

## HG SERIES

### G12 PERC Shingled

HiE-S430HG(FB) HiE-S435HG(FB)  
HiE-S440HG(FB)



Shingled  
Technology



For Both Residential  
& Commercial  
Applications



More Power  
Generation  
In Low Light



### G12 PERC Shingled

G12 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



### Reliable Warranty

Global brand with powerful financial strength provide reliable 25-year warranty.  
(Australia and Europe Only)



### Mechanical Strength

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



### UL / VDE Test Labs

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

## Hyundai's Warranty Provisions



- **25-Year Product Warranty**
- On material and workmanship  
**Australia and Europe Only**



- **25-Year Performance Warranty**
- Initial year: 98.0%
- Linear warranty after second year:  
with 0.55%p annual degradation,  
84.80% is guaranteed up to 25 years

## About Hyundai Energy Solutions Co., Ltd

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing High-quality PV products to more than 3,000 customers worldwide.

## Certification



Electrical Characteristics

		Mono-Crystalline Module (HiE-S__HG(FB))		
		430	435	440
Nominal Output (Pmpp)	W	430	435	440
Open Circuit Voltage(Voc)	V	43.5	43.6	43.7
Short Circuit Voltage (Isc)	A	12.68	12.79	12.90
Voltage at Pmax (Vmpp)	V	36.1	36.2	36.3
Cuurent at Pmax (Impp)	A	11.92	12.02	12.13
Module Efficiency	%	20.7	20.9	21.1
Cell Type	-	PERC Mono-Crystalline Silicon Shingled		
Maximum System Voltage	V	1,500		
Temperature Coefficiency of Pmax	%/°C	-0.34		
Temperature Coefficiency of Voc	%/°C	-0.27		
Temperature Coefficiency of Isc	%/°C	0.04		

\*All data at STC(Standard Test Conditions). Above data may be changed without prior notice.

\*Tolerance of Pmax:0~+5W.

\*Measuring uncertainty of power:±3%.

\* Performance deviation of Voc [V], Isc [A], Vm[V] and Im[A]:±3%.

Mechanical Characteristics


Dimensions	1,899 × 1,096× 30 mm (L × W × H)		
Weight	21.8kg		
Solar Cells	320 Cells, PERC Mono-crystalline Shingled (210 × 210mm)		
Output Cables	4mm <sup>2</sup> , +500mm/-1100mm(Vertical), +220mm/-180mm(Horizontal)	Connector	Stäubli : MC4-Evo2
Junction Box	IP68, TUV&UL, two diodes		
Construction	Front Glass: AR Coated tempered glass, 3.2mm Encapsulation: EVA (Ethylene-Vingl-Acetate)		
Frame	Anodized Aluminum		

Installation Safety Guide



- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	42.3°C ( ±2°C )
Operating Temperature	-40 ~ 85 °C
Maximum System Voltage	DC 1,500 / 1,000 (IEC)
Fire Rating	Class C
Series Fuse Rating [A]	25
Maximum Surface Load Capacity	Front 5,400 Pa Rear 2,400 Pa

Module Diagram (Unit: mm)

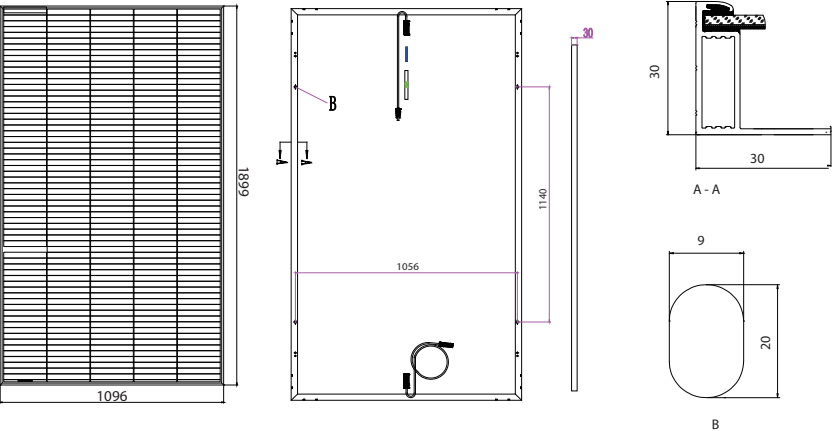

I-V Curves

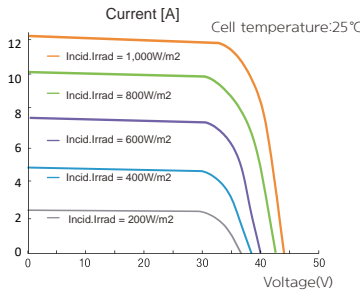

Manufactured in China



Sales & Marketing  
sales@hyundai-es.co.kr

Printed Date : 06/2022